

Types

One concept, two sizes

The EOS series combines all functions of a solid label printer with highest operating comfort.





*EOS*2, the compact one for label roll diameters up to 152 mm

Label printer		EO	S 2
Printable resolution	dpi	203	300
Print speed	up to mm/s	150	150
Print width	up to mm	108	105.7
Label roll diameter	up to mm	152	152
Power supply		100 - 240 VA	C, 50/60 Hz

eoS5 for large label rolls

with diameters up to 203 mm

Label printer		EO	S 5
Printable resolution	dpi	203	300
Print speed	up to mm/s	150	150
Print width	up to mm	108	105.7
Label roll diameter	up to mm	203	203
Power supply		100 - 240 VA	C, 50/60 Hz

Mobile printing

in production, warehousing or agriculture, wherever labels are required and access to electricity is missing. 24 V input voltage enable the printer to be power supplied by any powerful battery. For technical battery data see accessories





eoS2 mobile

for label roll diameters up to 152 mm

Label printer		EOS 2 mobile
Printable resolution	dpi	300*
Print speed	up to mm/s	150
Print width	up to mm	105.7
Label roll diameter	up to mm	152
Power supply		16.5 - 25 VDC

eo\$5 mobile

for label roll diameters up to 203 mm

Label printer		EOS 5 mobile
Printable resolution	dpi	300*
Print speed	up to mm/s	150
Print width	up to mm	105.7
Label roll diameter	up to mm	203
Power supply		16.5 - 25 VDC

Details



To achieve accurate imprint with slim materials and ribbons, slim print rollers are needed. These prevent from print roller wear, print head contamination and errors during material feed.

Roll holder

The label roll is inserted and automatically centered when closing.

Ribbon holder

The stop can be adjusted according to the ribbon width.

Print head 203 / 300 dpi

In case of cleaning or wear, the print head can be replaced easily by hand without tools.

4 Label sensor - gap or reflective

The sensor position can be adjusted via a spindle using the red rotary knob. The chosen position is indicated by a LED.

Print roller DR4

In case of cleaning or wear, the print roller can be replaced without tools.

6 Material guide

Using the rotary knob, the guides can be adjusted to the material width

7 Tear-off plate

made of thin sheet steel: jagged, so labels are cleanly separated

Operation panel

Intuitive and easy operation with self-explanatory symbols to configure the device setups

1 LED signal: Power ON

2 Status bar: Data reception, Record data stream, Ribbon pre-warning,

SD memory card / USB memory stick, WLAN, Ethernet,

USB slave, Time

3 Printer status: Ready, Pause, Number of printed labels per print job,

Label in peel-off position, Awaiting external start signal

USB slot for the Service Key or a memory stick,

to load data in the IFFS storage

5 Operation:

Cutter / perforation cutter: cutting Tear-off mode: print label

Jump to menu

Stop and delete all print jobs

Reprint last label

Label feed

Interrupt and continue print job



Interfaces on the back of the device



- 1 Slot for a SD memory card
- 2 x USB host to connect a Service Key, USB memory stick, keyboard, barcode scanner, USB WLAN stick, external control panel
- USB 2.0 Hi-speed Device to connect a PC
- Ethernet 10/100 Mbit/s
- 5 RS232C 1,200 to 230,400 baud/8 bit

Technical data

			1.1		1	.2	1.3	1.4
Label printer		Туре	EOS	2	EO	S 5	EOS 2 mobile	EOS 5 mobile
Material feed						cente	red	
Printing	Thermal transfer		•			_	•	•
nethod	Thermal direct		•				•	•
Printable resolution		dpi	203	300	203	300	300	300
rint speed		up to mm/s	150	150	150	150	150	150
rint width		up to mm	108	105.7	108	105.7	105.7	105.7
tart of printing	Distance to locating edge	mm				cente	red	
laterial ¹⁾								
aper, cardboard,	PI, PVC, PU, acrylate, Tyvec		•				•	•
Shrink tubes	ready-for-use							_
IIIIIK tubes	continuous, pressed							
extile tapes	continuous, presseu						•	•
acking	on rolls, reels		•				•	•
acimig	Fanfold					1		_
	Roll diameter	up to mm	15:		20		152	203
	Core diameter	mm	10.	_		38.1 -		200
	Winding					outside o		
abels	Width single-lane	mm				10 - 1		
	multi-lane	mm				5-1		
	Height excl. label backfeed	from mm				5		
	incl. label backfeed	from mm				12		
	Thickness	mm				0.05 -		
iner material	Width	mm				25 - 1		
	Thickness	mm				0.03 -		
ontinuous material	Width	mm				5 - 1	20	
	Thickness	mm				0.03 -	0.5	
	Weight (cardboard)	up to g/m²				180)	
hrink tubes	Width ready-for-use	up to mm				120)	
	continuous, pressed	mm				5 - 8	5	
	Thickness	up to mm				1.1		
Ribbon ²⁾	Ink side					outside o	r inside	
	Roll diameter	up to mm				72		
	Core diameter	mm				25.	4	
	Variable length	up to m				360)	
	Width	mm				25 - 1	14	
Printer sizes and we	eights							
Vidth x Height x Dep	th	mm	253 x 19	1 x 322	264 x 24	17 x 412	253 x 191 x 322	264 x 247 x 412
Veight		kg	4		į	5	4	5
abel sensor indica	ting the position							
Sap sensor		for					irks on transparant mater	ials
Reflective sensor	reflex from below or top	for	labels and	end of mate	rial, print mar	ks on non-tran	sparent materials	
Distance of sensor	from centre to locating edge of	centered mm				0 - 5	8	
laterial passage		up to mm				4		
Material passage Mectronics								
Material passage E lectronics Processor 32 bit cloc	k rate	MHz				800		
Material passage Electronics Processor 32 bit cloc Main memory (RAM)	krate	MHz MB				800 250	5	
Material passage Electronics Processor 32 bit cloo Main memory (RAM) Data memory (IFFS)		MHz MB MB				800 250 50	5	
Material passage Electronics Processor 32 bit cloo Main memory (RAM) Data memory (IFFS) Slot to connect a SD	memory card (SDHC, SDXC)	MHz MB				800 256 50 512	5	
Material passage Electronics Processor 32 bit cloo Main memory (RAM) Data memory (IFFS) Blot to connect a SD Battery for time and	memory card (SDHC, SDXC) date, real-time clock	MHz MB MB up to GB				800 256 50 512	<u>)</u>	
Material passage Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Slot to connect a SD Battery for time and Data memory when	memory card (SDHC, SDXC)	MHz MB MB up to GB				800 256 50 512	<u>)</u>	
Material passage Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Blot to connect a SD Battery for time and Data memory when paterfaces	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria	MHz MB MB up to GB				800 250 50 512	<u>)</u>	
Material passage Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Blot to connect a SD Battery for time and Data memory when pateriaces RS232C 1,200 to 230	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit	MHz MB MB up to GB				800 256 50 512	<u>)</u>	
Material passage Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Blot to connect a SD Battery for time and Data memory when pateriaces RS232C 1,200 to 230	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria	MHz MB MB up to GB				800 256 50 512	2	
Material passage stectronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) slot to connect a SD Battery for time and Data memory when paterfaces [SS232C 1,200 to 230] JSB 2.0 Hi-speed decided in the speed d	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC	MHz MB MB up to GB	LPD, Rawli	Pprinting, SC	DAP web servi	800 256 50 51.1	2 bDAV	
Material passage Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Slot to connect a SD Battery for time and Data memory when a Interfaces RS232C 1,200 to 230	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC	MHz MB MB up to GB	LPD, Rawli DHCP, HTT	Pprinting, SC P/HTTPS, FT	DAP web servi P/FTPS, TIME	800 256 50 51.1	2	
Adaterial passage Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Slot to connect a SD Battery for time and Data memory when pateriaces RS232C 1,200 to 230 JSB 2.0 Hi-speed december 10/100 Mbit Ex USB host on the company of	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC t/s control panel,	MHz MB MB up to GB	DHCP, HTT	P/HTTPS, FT	P/FTPS, TIME	800 256 50 512 •••••••••••••••••••••••••••••••••••	2 bDAV	
Material passage Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Elot to connect a SD Battery for time and Data memory when pateriaces RS232C 1,200 to 230 JSB 2.0 Hi-speed dev Ethernet 10/100 Mbit X USB host on the company of the company	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC t/s control panel,	MHz MB MB up to GB	DHCP, HTT Service Ke	P/HTTPS, FT y, USB stick,	P/FTPS, TIME USB WLAN sti	800 256 50 512 •••••••••••••••••••••••••••••••••••	bDAV f, SNMP, SMTP, VNC	
Atterial passage clectronics Processor 32 bit cloc Main memory (RAM) that a memory (IFFS) clot to connect a SD that the role of the role o	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC t/s control panel, pack of a unit	MHz MB MB up to GB	DHCP, HTT Service Ke keyboard,	P/HTTPS, FT y, USB stick, barcode sca	P/FTPS, TIME USB WLAN sti nner, external	800 256 50 51.2 ••••••••••••••••••••••••••••••••••••	bDAV f, SNMP, SMTP, VNC stick with a rod antenna,	
Atterial passage Electronics Processor 32 bit cloc Main memory (RAM) Pata memory (IFFS) Elot to connect a SD Eattery for time and Pata memory when pata memory	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC t/s control panel, pack of a unit	MHz MB MB up to GB	DHCP, HTT Service Ke keyboard,	P/HTTPS, FT y, USB stick, barcode sca	P/FTPS, TIME USB WLAN sti	800 256 50 51.2 ••••••••••••••••••••••••••••••••••••	bDAV f, SNMP, SMTP, VNC stick with a rod antenna,	
laterial passage lectronics rocessor 32 bit cloc lain memory (RAM) rata memory (IFFS) lot to connect a SD latery for time and rata memory when pata which was a substitute of the substitu	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC t/s control panel, back of a unit lz 802.11b/g/n	MHz MB MB up to GB	DHCP, HTT Service Ke keyboard,	P/HTTPS, FT y, USB stick, barcode sca	P/FTPS, TIME USB WLAN sti nner, external	800 256 50 51.2 ••••••••••••••••••••••••••••••••••••	bDAV f, SNMP, SMTP, VNC stick with a rod antenna,	
laterial passage lectronics rocessor 32 bit cloc lain memory (RAM) ata memory (IFFS) lot to connect a SD attery for time and ata memory when pater faces S232C 1,200 to 230 SB 2.0 Hi-speed dev thernet 10/100 Mbit x USB host on the c x USB host on the b SB WLAN stick 2.4 GH 2.4 GH eripheral connection	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC t/s control panel, back of a unit lz 802.11b/g/n dz 802.11b/g/n+5 GHz 802.11a/n/a	MHz MB MB up to GB	DHCP, HTT Service Ke keyboard,	P/HTTPS, FT y, USB stick, barcode sca	P/FTPS, TIME USB WLAN sti nner, external	800 256 50 512 ———————————————————————————————————	bDAV f, SNMP, SMTP, VNC stick with a rod antenna,	
laterial passage lectronics rocessor 32 bit cloc lain memory (RAM) rotata memory (IFFS) lot to connect a SD rattery for time and rata memory when pater aces S232C 1,200 to 230 SB 2.0 Hi-speed dev thernet 10/100 Mbit x USB host on the control of the control x USB host on the back according to the control SB WLAN stick 2.4 GH 2.4 GH reripheral connection perating data	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC t/s control panel, back of a unit lz 802.11b/g/n dz 802.11b/g/n+5 GHz 802.11a/n/a	MHz MB MB up to GB	DHCP, HTT Service Ke keyboard,	P/HTTPS, FT y, USB stick, barcode sca ode or infrast	P/FTPS, TIME USB WLAN sti nner, external	800 256 50 512 ———————————————————————————————————	bDAV f, SNMP, SMTP, VNC stick with a rod antenna,	VDC
Atterial passage Electronics Processor 32 bit cloc Main memory (RAM) Pata memory (IFFS) Elot to connect a SD Eattery for time and Pata memory when pata memory	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC t/s control panel, back of a unit iz 802.11b/g/n iz 802.11b/g/n iz 802.11b/g/n iz 802.11b/g/n + 5 GHz 802.11a/n/a on USB host, 24 VDC	MHz MB MB up to GB	DHCP, HTT Service Ke keyboard, hotspot mo	P/HTTPS, FT y, USB stick, barcode sca ode or infrast 100 - 240 VA	P/FTPS, TIME USB WLAN sti nner, external	800 256 50 51.2 Cce, OPC UA, We , NTP, Zerocon ck, USB WLAN control panel	bDAV f, SNMP, SMTP, VNC stick with a rod antenna,	VDC
laterial passage lectronics rocessor 32 bit cloc lain memory (RAM) rata memory (IFFS) lot to connect a SD rattery for time and rata memory when paterfaces S2322C 1,200 to 230 SBB 2.0 Hi-speed dev thernet 10/100 Mbit x USB host on the c x USB host on the c x USB host on the c SBB WLAN stick 2.4 GH ceripheral connection perating data lower supply	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC t/s control panel, back of a unit lz 802.11b/g/n dz 802.11b/g/n + 5 GHz 802.11a/n/a on USB host, 24 VDC	MHz MB MB up to GB	DHCP, HTT Service Ke keyboard, hotspot mo	P/HTTPS, FT y, USB stick, barcode scale ode or infrast 100 - 240 VA 8 W / typical	P/FTPS, TIME USB WLAN sti nner, external ructure mode	800 256 50 512 ce, OPC UA, We, NTP, Zerocon ck, USB WLAN control panel	bDAV f, SNMP, SMTP, VNC stick with a rod antenna,	VDC
laterial passage lectronics rocessor 32 bit cloc lain memory (RAM) rata memory (IFFS) lot to connect a SD rattery for time and rata memory when paterfaces S2322C 1,200 to 230 SBB 2.0 Hi-speed dev thernet 10/100 Mbit x USB host on the c x USB host on the c x USB host on the c SBB WLAN stick 2.4 GH ceripheral connection perating data lower supply	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC t/s control panel, back of a unit lz 802.11b/g/n dz 802.11b/g/n + 5 GHz 802.11a/n/a on USB host, 24 VDC	MHz MB MB up to GB	DHCP, HTT Service Ke keyboard, hotspot mo Standby 1 +5 - 40°C	P/HTTPS, FT y, USB stick, barcode scar ode or infrast 100 - 240 VA 8 W / typical / 10 - 85 %, n	P/FTPS, TIME USB WLAN sti nner, external ructure mode a.C, 50/60 Hz 45 W / max. 1	SOUR SOUR SERVING SERVING SOUR	bDAV f, SNMP, SMTP, VNC stick with a rod antenna,	VDC
Material passage Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Elot to connect a SD Battery for time and Data memory when parterfaces S2S232C 1,200 to 230 SBB 2.0 Hi-speed dev Ethernet 10/100 Mbit Ex USB host on the clock USB wLAN stick 2.4 GH Ceripheral connection Departing data Dower supply Dower consumption	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC t/s control panel, back of a unit lz 802.11b/g/n dz 802.11b/g/n+5 GHz 802.11a/n/a on USB host, 24 VDC dity Operation	MHz MB MB up to GB	DHCP, HTT Service Ke keyboard, hotspot mo Standby 1 +5 - 40°C 0 - 60°C	P/HTTPS, FT y, USB stick, barcode scar ode or infrast 100 - 240 VA 8 W / typical / 10 - 85 %, n / 20 - 85 %, n	P/FTPS, TIME USB WLAN sti nner, external ructure mode C, 50/60 Hz 45 W / max. 1 ot condensing	SOU W	bDAV f, SNMP, SMTP, VNC stick with a rod antenna,	VDC
Material passage Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Blot to connect a SD Battery for time and Data memory when paterfaces RS232C 1,200 to 230 USB 2.0 Hi-speed dev Ethernet 10/100 Mbit Ex USB host on the control of the SD Ex USB host on the Control of the SD Deripheral connection Departing data Power supply Power consumption Emperature / humic	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC t/s control panel, back of a unit lz 802.11b/g/n dz 802.11b/g/n+5 GHz 802.11a/n/a on USB host, 24 VDC dity Operation Stock	MHz MB MB up to GB	DHCP, HTT Service Ke keyboard, hotspot mo Standby 1 +5 - 40°C 0 - 60°C -25 - 60°C	P/HTTPS, FT y, USB stick, barcode scar ode or infrast 100 - 240 VA 8 W / typical / 10 - 85 %, n / 20 - 85 %, n	P/FTPS, TIME USB WLAN sti nner, external ructure mode C, 50/60 Hz 45 W / max. 1 ot condensing ot condensing ot condensing	SOU W	bDAV f, SNMP, SMTP, VNC stick with a rod antenna,	VDC
Material passage Electronics Processor 32 bit cloc Main memory (RAM) Data memory (IFFS) Elot to connect a SD Battery for time and Data memory when parterfaces S2S232C 1,200 to 230 SBB 2.0 Hi-speed dev Ethernet 10/100 Mbit Ex USB host on the clock USB wLAN stick 2.4 GH Ceripheral connection Departing data Dower supply Dower consumption	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC t/s control panel, back of a unit lz 802.11b/g/n dz 802.11b/g/n+5 GHz 802.11a/n/a on USB host, 24 VDC dity Operation Stock	MHz MB MB up to GB	DHCP, HTT Service Ke keyboard, hotspot mo Standby 1. +5 - 40°C 0 - 60°C -25 - 60°C CE, FCC CL	P/HTTPS, FT y, USB stick, barcode scal ode or infrast 100 - 240 VA 8 W / typical / 10 - 85 %, n / 20 - 85 %, n / 20 - 85 %, n ass A, ICES-3	P/FTPS, TIME USB WLAN sti nner, external ructure mode C, 50/60 Hz 45 W / max. 1 ot condensing ot condensing ot condensing	ce, OPC UA, We, NTP, Zerocon ck, USB WLAN control panel	bDAV f, SNMP, SMTP, VNC stick with a rod antenna,	
Atterial passage Electronics Processor 32 bit cloc Main memory (RAM) Pata memory (IFFS) Elot to connect a SD Eattery for time and Pata memory when pata memory	memory card (SDHC, SDXC) date, real-time clock power is switched off (e.g. seria ,400 baud/8 bit vice to connect a PC t/s control panel, back of a unit lz 802.11b/g/n dz 802.11b/g/n+5 GHz 802.11a/n/a on USB host, 24 VDC dity Operation Stock	MHz MB MB up to GB	DHCP, HTT Service Ke keyboard, hotspot mo Standby 1. +5 - 40°C 0 - 60°C -25 - 60°C CE, FCC CL	P/HTTPS, FT y, USB stick, barcode scal ode or infrast 100 - 240 VA 8 W / typical / 10 - 85 %, n / 20 - 85 %, n / 20 - 85 %, n ass A, ICES-3	P/FTPS, TIME USB WLAN sti nner, external ructure mode AC, 50/60 Hz 45 W / max. 1: ot condensing ot condensing ot condensing ot condensing ot condensing ot colus, CB,	ce, OPC UA, We, NTP, Zerocon ck, USB WLAN control panel	bDAV f, SNMP, SMTP, VNC stick with a rod antenna,	

¹⁾ The material specifications are standard values. Applications with small labels, thin, slim, thick and stiff materials as well as strongly adherent labels have to be tested.
²⁾ The ribbon should at least correspond with the width of the liner material.

 \blacksquare standard \Box option

Technical data

Setup options	Drint	Dogian	
	Print Labels Ribbon Tear-off Cut	Region: - Language - Country - Keyboard - Time zone	
	Enterfaces Error	- Time 2016 Time Display: - Brightness - Power saving mode - Orientation Interpreter	
Status bar			
	Data reception Record data stream Ribbon pre-warning SD memory card plugged USB memory stick plugged	WLAN Ethernet USB slave Time	
Monitoring			
	Ribbon pre-warning End of ribbon End of material	Periphery error Print head voltage Print head temperature Print head open	
Test routines	and the state of the state of the state of	and detection	
System diagnostics Information display,	on start-up, including print l Status printout	Test grid	
test printout, analysis	Fonts list List of devices WLAN status	Label profile List of events Monitor mode	
Status reports	 Printout of device settings, e.g. print lengths and servi Device status request by so Display of, e.g., network en barcode errors, periphery e 	ce hours oftware command rors, no links,	
Fonts			
Font types internally provided	5 bitmap fonts: 12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B	7 vector fonts: AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold	
to be stored	TrueType fonts		
Character sets	Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, EBCDIC 500 ISO 8859-1 to -10 and -13 to WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R		
	Western European Eastern European Chinese simplified Chinese traditional Thai	Cyrillic Greek Latin Hebrew Arabic	
Bitmap fonts	Widths and heights 1 - 3 mm Zoom factors 2 to 10 Orientations 0°, 90°, 180°, 27		
Vector / TrueType fonts	Size in width and height 0,9 Variable zoom Orientation 360° in steps of		
Font styles	bold, italic, underlined, outline, inverse - depending from the font types		
Character spacing	variable or monospace		

Graphics			
Graphic elements	Lines, arrows, rectangles, circles, ellipses - filled or filled with fading		
Graphic formats	PCX, IMG, BMP, TIF, MAC, GII	F, PNG	
Codes			
1D barcodes (linear)	Code 39, Code 93 Code 39 Full ASCII Code 128 A, B, C EAN 8, 13 EAN/UCC 128/GS1-128 EAN/UPC Appendix 2 EAN/UPC Appendix 5 FIM HIBC	Interleaved 2/5 Ident and routing code of Deutsche Post Codabar JAN 8, 13 MSI Plessey Postnet RSS 14 UPC A, E, E0	
2D and stacked codes	DataMatrix DataMatrix Rectangle Exten QR code Micro QR code GS1 QR code GS1 DataMatrix PDF 417 Micro PDF 417 UPS MaxiCode GS1 DataBar Aztec Codablock F Dotcode RSS 14 truncated, limited, s All codes are variable in tern modular width and ratio; or check digit, plain text printe are options depending from	tacked, stacked omni-dir ns of height, rientations 0°, 90°, 180°, 2 out and start / stop code	
Software			
Label software	cablabel S3 Lite cablabel S3 Viewer cablabel S3 Pro cablabel S3 Print		
Also running with	CODESOFT Loftware Spectrum NiceLabel BarTender		
Stand-alone operation			
Windows printer drivers for	Windows 10 Windows 11 Cortification WHOL in proper	Server 2016 Server 2019 Server 2022	
	Certification WHQL in prepa		_
Apple printer drivers	Mac OS X 10.6 or any later re		
Linux printer drivers	CUPS 1.2 or any later releas	e	
Programming	JScript printer language abc Basic Compiler ZPL II (Datastream be teste	ed in advance)	
Integration	SAP Database Connector		
Administration	Printer control Configuration in Intranet ar	nd Internet	

cab uses free and Open Source Software in its products. For information see www.cab.de/opensource

Label software cablabel S3

Designing, printing, administrating

cablabel S3 opens up the full potential of cab devices.

First of all, the label must be designed. Only when it comes to printing it has to be decided whether the label shall be processed on a label printer, a print and apply or marker laser system. cablabel S3 is of a modular design which makes it adaptable to requirements step by step. To support functions like native JScript programming, elements such as the JScript Viewer are embedded as plug-ins. The designer user interface and the JScript code are synchronized in real time. Special functions like the Database Connector or barcode testers can be integrated. For further information see www.cab.de/en/cablabel



- Toolbar to create different label objects
- 2 **Tabs**to quickly switch from one running label design to another
- 3 Layers
 to administrate different label objects

- Obesigner simplifies the design and displays the label WYSIWYG
- 5 Printer spooler to monitor all print jobs and the state of the printer
- Drivers
 for setting and the communication with devices

Printing in stand-alone operation

This operating mode is the printer's ability to select and print labels even when it is not connected connected to a host system.

The label has to be designed with a software such as cablabel S3 or by direct programming with a text editor on a PC. Label formats, texts, graphics as well as database contents are stored on a memory card, a USB memory stick or in the internal IFFS memory.

Only variable data are sent to the printer via a keyboard, a barcode scanner, scales or other host systems and/or recalled by the Database Connector from the host and printed.



Printer control

Drivers

cab provides drivers to control a printer with software other than cablabel S3.



Free download on www.cab.de/en/support



Programming

JScript

To control the printer, cab has developed the embedded programming language JScript. See manual for free download at www.cab.de/en/programming


ABC abc Basic Compiler

In addition to JScript and as an integral part of the firmware, it allows advanced printer programming before data are sent to printout. For example, external printer languages can be replaced without interfering in the current print job. Also data from other systems such as a scale, a barcode scanner or PLC can be integrated.

Integration

Printer Vendor Program

As a partner in SAP's¹⁾ Printer Vendor Program, cab has developed a replace method to enable easy control of a cab printer via SAPScript from SAP R/3. Only variable data are sent to the printer by the host. Pictures and fonts that had priorly been stored in the local memory (IFFS, memory card, etc.) are merged.

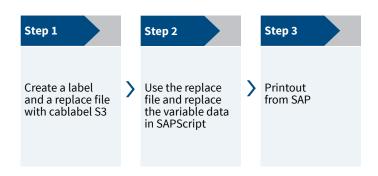

¹⁾ SAP and all corresponding logos are trademarks or registered trademarks of SAP SE

Printer administration

Configuration in Intranet and Internet

The HTTP and FTP server integrated in the printer via standard programs like a web browser or FTP clients allows printer control and configuration, firmware updates and memory card administration. Via email or SNMP, the SNMP and SMTP client datagram sends status, warning and error messages to administrators and users. Time and date are synchronized by a time server.



Database Connector

Printers connected to a network may directly access data from a central ODBC or OLEDB-ready database and print it on a label. While printing, data can be rewritten to the database.



Accessories for all types of devices

2.3	Print roller DR4-30 Material width up to 30 mm; synthetic rubber coating for accurate imprint
	Print roller DR4-60 Material width up to 60 mm; synthetic rubber coating for accurate imprint
2.4	External operation panel If the operation panel of a printer cannot be accessed, an additional external one can be plugged. Same functionality as on the printer Landscape or portrait mode Operability as desired on the external operation panel or on the printer
	Printer connectivity: USB 2.0 Hi-Speed device cab provides specified connecting USB cables for power supply. Lengths are 1.8 m to 16 m.

2.5	SD memory card
2.6	USB memory stick
2.7	USB WLAN stick 2.4 GHz 802.11b/g/n
2.8	USB WLAN stick 2.4 GHz 802.11b/g/n + 5 GHz 802.11a/n/ac in infrastructure mode with rod antenna for extended reach
2.10	Label selection - I/O box Up to 16 different labels per box can be selected from the memory card by a master control, e.g. PLC. Two boxes can be connected. The I/O box allows simple PLC control processes with four inputs and outputs each via abc programming.
3.1	Connecting cable RS232 C 9/9 pin, length 3 m



Cutter

All printable materials can be cut.

The cutter can be pivoted to exchange the material.

		Cutter
Technical data		for EOS 2, EOS 5
Material Width	mm	120
Weight card	ooard gr/m ²	60 - 240
Thickness	mm	0.05 - 1.1
Cutting length	from mm	10
Gap height	up to mm	2.5
Cuts/min	up to	200
Label winding		preferably outside
Monitoring		Cutter pivoted, final cutter position has not been reached



Cutter and perforation cutter

Continuous materials such as textiles or shrink tubes are perforated before they are manually separated. In addition, the materials can also be cut. The cutter can be pivoted to exchange the material.

			Cutter and perforation cutter
Technical data			for EOS 2, EOS 5
Perforating	Web distance n	nm	2.5
	Web width n	nm	0.8
Material Wid	th n	nm	45
Wei	ght cardboard gr	/m²	60 - 240
Thic	ckness n	nm	0.05 - 1.1
Cutting leng	th from n	nm	10
Gap height	up to n	nm	2.5
Cuts/min	up	to	200
Label windir	ıg		preferably outside
Monitoring			Cutter pivoted, final cutter
			position has not been reached

Accessories



External unwinder

When inserted, the material rolls are automatically centered. The unwinder cannot be installed with EOS mobile.

		External unwinder
Technical data		for EOS 2, EOS 5
Roll diameter	up to mm	390
Core diameter	from mm	38
Winding		outside or inside
Roll weight	up to kg	4



Brake for fanfold labels

for EOS 2 and EOS 5. The fanfold material is tightly fed in the printer and printed precisely. The brake cannot be installed with EOS mobile.



Battery pack

with a charger unit already included for mobile operation. It is installed under EOS mobile. Per battery capacity, a maximum of 500 print jobs with a label size of 100 x 68 mm and 15 per cent density may be processed.

		Battery pack 2
Technical data		for EOS 2, EOS 5
Nominal voltage	V	18
Capacity	Ah	2.1
Power	Wh	36
Charging time approx. h		2
Charging voltage		100 - 240 VAC, 50/60 Hz
Dimensions W x H x D mm		221 x 58 x 270
Weight	kg	2.5

Delivery program

Pos.		Part no.	Printers		
1.1	od cos	5978201 5978202	Label printer EOS 2/200 Label printer EOS 2/300		
1.2	000 000	5978211 5978212	Label printer EOS 5/200 Label printer EOS 5/300		
1.3	os 000 000	5978202.600	Label printer EOS 2 mobile/300		
1.4	COD POS	5978212.600	Label printer EOS 5 mobile/300		
		Scope of deliv	very		
	Label printer Power cable Type E+F, length 1.8 m Connecting cable USB, length 1.8 m Instructions DE / EN				
		Provided onli			
	Instructions in 30 languages Configuration manual DE / EN / FR Service manual DE / EN Spare parts list DE / EN Programming manual EN Inttps://setup.cab.de/en Windows printer drivers for Windows 10 Server 2016 Windows 11 Server 2019 Server 2022 Certification WHQL in preparation Apple Mac OS X printer drivers DE / EN / FR Linux printer drivers DE / EN / FR Label software cablabel S3 Lite cablabel S3 Viewer Database Connector				
Pos.		Part no.	Wear parts		
2.1		5966096.001	Print head 200 dpi		
		5965580.001	Print head 300 dpi		
2.2	***************************************	5965488.001	Print roller DR4		
Pos.		Part no.	Accessories		
2.3		5966218.001	Print roller DR4-30		
		5966219.001	Print roller DR4-60		

Scopes of delivery, design and technical specifications correspond to the date of the printing. Subject to change. The data provided in the catalog do not represent any warranty or guarantee.



Information is also available on the Internet: www.cab.de/en/eos

Pos.		Part no.	Accessories
		6010186	External operation panel
	anb.	5907718.850	Connecting cable USB , 1.8 m
2.4	**	5907730.850	Connecting cable USB, 3 m
2.4		5907750.850	Connecting cable USB, 5 m
		5907760.850	Connecting cable USB, 11 m
		5907765.850	Connecting cable USB, 16 m
2.5		5977370	SD memory card
2.6		5977730	USB memory stick
2.7	2	5978912.001	USB WLAN stick 2.4 GHz 802.11b/g/n
2.8		5977731	USB WLAN stick with rod antenna 2.4 GHz 802.11b/g/n + 5 GHz a/n/ac
2.10		5948205	Label selection - I/O box
3.1		5550818	Connecting cable RS232 C 9/9 pin, length 3 m
4.1		5965520 5966730	Cutter EOS 2 Cutter EOS 5
4.2		5965910 5969891	Cutter and perforation cutter EOS 2 Cutter and perforation cutter EOS 5
5.1	Ö	5965586	External unwinder EOS
5.2		5953753	Brake for fanfold labels EOS
6.1	241 III Mayor	5542640 5542660	Battery pack 2 EOS 2 Battery pack 2 EOS 5
Pos.		Part no.	Label software
11.7		Bundle 5588001 5588100 5588150 5588151 5588152 5588002 5588105 5588106 5588155 5588156 5588157 in preparation	cablabel S3 Lite (Download at cab.de/en) cablabel S3 PRO 1 WS cablabel S3 PRO 5 WS cablabel S3 PRO 10 WS cablabel S3 PRO 1 add. licence cablabel S3 PRO 9 add. licences cablabel S3 PRO 9 add. licences cablabel S3 Print 1 WS cablabel S3 Print 5 WS cablabel S3 Print 10 WS cablabel S3 Print 1 add. licence cablabel S3 Print 4 add. licences cablabel S3 Print 9 add. licences cablabel S3 Print 9 add. licences cablabel S3 Print 9 add. licences
11.10		9008486	Programming manual EN, printed copy
			1 17

Overview of cab products

Label printers MACH1, MACH2



Label printers EOS 2



Label printers EOS 5



Label printers MACH 4S



Label printers SQUIX 2



Label printers **SQUIX 4**



Label printers SQUIX 6.3



Label printers **SQUIX 8.3**



Label printers **XD Q** double-sided



Label printers XC Q two-colored



Print and apply systems HERMES Q



Print and apply systems Hermes C two-colored



Tube labeling systems AXON 1



Print modules PX Q



Labels and ribbons



Label software cablabel S3



Label dispensers HS, VS



Labeling heads



Marking lasers



Laser marking systems



Germany

cab Produkttechnik GmbH & Co KG

Karlsruhe

Phone +49 721 6626 0

www.cab.de

France

cab Technologies S.à.r.l.

Niedermodern Phone +33 388 722501

www.cab.de/fr

USA

cab Technology, Inc.

Chelmsford, MA

Phone +1 978 250 8321

www.cab.de/us

Mexico

cab Technology, Inc.

Juárez

Phone +52 656 682 4301

www.cab.de/es

Taiwan

cab Technology Co., Ltd.

Taipei

Phone +886 (02) 8227 3966

www.cab.de/tw

China

cab (Shanghai) Trading Co., Ltd.

Shanghai

Phone +86 (021) 6236 3161

www.cab.de/cn

Singapore

cab Singapore Pte. Ltd.

Singapore

Phone +65 6931 9099

www.cab.de/en

South Africa

cab Technology (Pty) Ltd.

Randburg

Phone +27 11 886 3580

www.cab.de/za

cab // 820 distribution and service partners in more than 80 countries

Licensed cab partner



Norris Print-Tech A/S

Sofiendalsvej 81 DK-9200 Aalborg SV

Phone +45 98 18 17 77 info@npt.dk

www.npt.dk

