


Products need labeling
Label printers
for desktop applications



MACH1/2

Key features

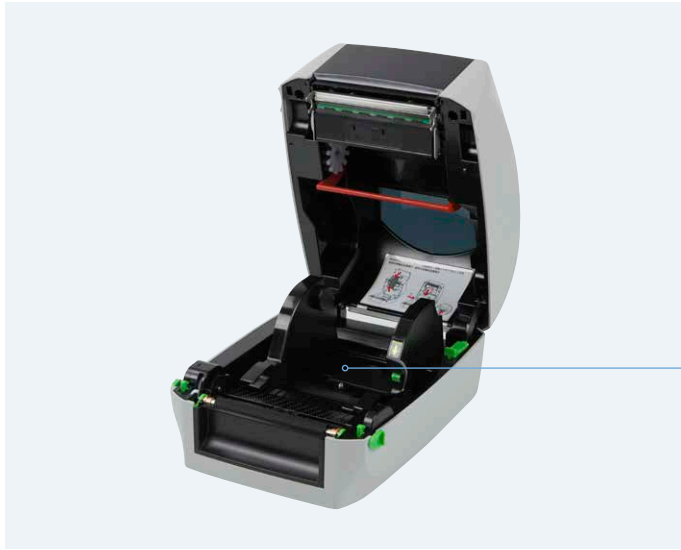

With the MACH1/2, cab completes its printer range in the lower price segment:

- Reliable 4" desktop printers in proven technology
- Ideal for small to medium-volume printing
- For thermal transfer and direct thermal printing
- MACH1 with control buttons and LED display, MACH2 with colored LCD display and navigator pad
- Printable resolutions 200 dpi or 300 dpi for both printer types
- Processing of label widths up to 118 mm
- The solid double-walled construction allows printing in all areas.



2 Operation

The MACH1/2 can be opened up widely to insert the ribbon and the label roll ①. Adjustment of different materials is done via a calibration button without loss of time.

The multi-language color display ② and the cab navigator pad ③ of the MACH2 are logically structured and intuitively operable for the user.

A total of four interfaces (including Ethernet) ④ offer flexibility and fast device connection.

Fields of application

Business area	Applications
Office / authorities	Information and warning labels, inventory labels
Production	Product labels, protocol, certification and test labels
Healthcare	Labels for patient admission, blood banks
Trading	Product labels, pricing
Warehouse	Labels for storage location, shelf labeling
Transport / logistics	Address and shipping labels, incoming goods
Events	Labels for events in sports and schools, tickets

Software and printer drivers

Besides a cab Windows driver, each device is provided with the cablabel S3 software which allows creating label formats of all kinds.

Materials and accessories

The MACH1/2 rely on standard ribbons with an 1" core and a length of 300 m. The maximum outer diameter for the label roll to be inserted in centered position is 127 mm.

Accessories such as the cutter, the present sensor and the external unwinder allow universal use of the low-maintenance compact printers.

Delivery program

Pos.		Part no.	Printers
1.1		5430001	Label printer MACH1/200
		5430002	Label printer MACH1/300
1.2		5430003	Label printer MACH2/200
		5430004	Label printer MACH2/300

Pos.	Part no.	Accessories
2.1	5430051	Cutter (cutting height between labels at least 30 mm)
2.2	5430052	Present sensor (label height at least 25 mm)
2.3	5430053	External unwinder (for roll diameters up to 250 mm)

Technical data¹⁾

				1.1		1.2	
Label printer				MACH1		MACH2	
Print head							
Printing method				Thermal transfer, direct thermal			
Printable resolution		dpi		203	300	203	300
Print speed		up to mm/s		127	102	177	127
Print width		up to mm		108	105.7	108	105.7
Material ²⁾							
Paper, cardboard, plastics continuous material on a roll or fanfold				■		■	
Width	Labels	mm		25 - 112			
	Liner	mm		25 - 118			
Label height	at least mm			4			
	up to mm			1,727	762	1,727	762
Thickness	mm			0.06 - 0.2			
Weight	g/m²			60 - 160			
Roll	Outer diameter	up to mm		127			
	Core diameter	mm		25.4 - 38.1			
Winding				outside or inside			
Ribbon							
Ink side				outside or inside			
Roll diameter	up to mm			68			
Core diameter	mm			25.4			
Variable lenght	up to m			300			
Width	mm			25 - 114			
Printer size and weights							
Width x Height x Depth	mm			210 x 186 x 280			
Weight	kg			2.7	3		
Label sensor with position indication							
Gap sensor				fixed at center			
Reflective sensor from below				adjustable			
Electronics							
Storage	Flash	MB	16				
	SDRAM	MB	8 (4 MB for the application)				
Batterie for current date / time, real-time clock				■		■	
Interfaces							
RS232C				■		■	
USB for PC connection				■		■	
Ethernet				■		■	
USB host				-		■	
Operating data							
Power supply				100 - 240 VAC ~ 50/60 Hz, PFC			
Power consumption		up to W		60			
Temperature / humidity	Operation		5 - 40°C / 30 - 85 % not condensing				
	Storage		-20 - 50°C / 10 - 90 % not condensing				
	Transport		-25 - 60°C / 20 - 80 % not condensing				
Approvals				CE, FCC, CCC, CB, UL, KCC			

¹⁾ All information on the design and technical specifications correspond to the date of the printing. Subject to change. The data provided in the catalog do not represent any warranty or guarantee. For current data see website www.cab.de/en/mach1-2

²⁾ Limitations may apply to small labels, thin materials or strong adhesives. These applications need to be tested and approved.

■ Standard □ Option

Operation panel			
Buttons	Feed	■	■
	On / off	■	■
	Material sensor calibration	■	■
LEDs	Ready	■	-
	Status	■	-
Colored TFT display with navigator pad		-	■
On display (MACH2)			
	Printer settings Label settings Devices Diagnostics Exit Digital clock		
Control			
	End of ribbon End of material Print head open		
Testing			
System diagnostics	when device is switched on, including print head detection		
Short status report, status printout	Printer settings Label settings Devices Diagnostics Exit Test printout Label calibration		
Fonts			
Font types	11 bitmap fonts including OCR-A, OCR-B		
Character sets	Codepage 437, 737, 850 bis 852, 855, 857, 860 bis 863, 865, 866, 869 Windows 1250 bis 1255, 1257		
Bitmap fonts	Zoom factor up to eight, orientation 0°, 90°, 180°, 270°		
Graphic formats			
	PCX, BMP		
Codes			
1D barcodes (linear)	Code 39 Code 93 EAN/UPC Appendix 2 EAN/UPC Appendix 5 Interleaved 2/5 Codabar Code 128 A, B, C EAN 128 UCC 128	Postnet ITF 14 China Postal Code HIBC MSI Plessey Telepen FIM GS1 DataBar	
2D and stacked codes	DataMatrix QR code Micro QR code MaxiCode	PDF417 Micro PDF417 Aztec	
Software			
Printer language	EZPL		■
Label software	cablabel S3 Lite cablabel S3 Viewer cablabel S3 Pro cablabel S3 Print		■ ■ □ □
Windows drivers certified 32/64 Bit for	Windows Vista Windows 7 Windows 8 Windows 8.1 Windows 10	Server 2008 Server 2008 R2 Server 2012 Server 2012 R2 Server 2016 Server 2019	■

Germany
cab Produkttechnik GmbH & Co KG
Karlsruhe
Phone +49 721 6626 0
www.cab.de

France
cab Technologies S.à.r.l.
Niedermöden
Phone +33 388 722501
www.cab.de/fr

USA
cab Technology, Inc.
Chelmsford, MA
Phone +1 978 250 8321
www.cab.de/us

Mexico
cab Technology, Inc.
Juárez
Phone +52 656 682 4301
www.cab.de/es

Taiwan
cab Technology Co., Ltd.
Taipei
Phone +886 (02) 8227 3966
www.cab.de/tw


China
cab (Shanghai) Trading Co., Ltd.
Shanghai
Phone +86 (021) 6236 3161
www.cab.de/cn

Singapore
cab Singapore Pte. Ltd.
Singapore
Phone +65 6931 9099
www.cab.de/en

South Africa
cab Technology (Pty) Ltd.
Randburg
Phone +27 11 886 3580
www.cab.de/za

cab // 820 distribution and service partners in more than 80 countries

Licensed cab partner



Norris Print-Tech A/S

Sofiendalsvej 81
DK-9200 Aalborg SV
Phone +45 98 18 17 77
info@npt.dk
www.npt.dk

